

PLEX ST INSTALL INSTRUCTIONS


Preparation

- Remove windshield from fairing.
- Optional: Remove headlight if using headlight harness.

Warning: Motorcycle must be powered off.

Step 1 – Assemble Speaker & Bracket


Attach the Plex Audio speaker system to the mounting bracket using the four (4) provided nylon hex nuts. Tighten evenly. Do not overtighten.

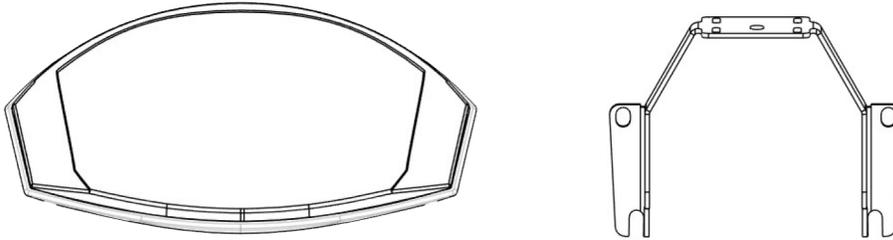

- ❶ Speaker System ❷ Mounting Bracket ❸ Nylon Hex Nuts (4x)

Step 2 – Install Assembly into Fairing

Slide assembled speaker and bracket between the fairing and motorcycle. Align with four protruding inner fairing bolts. Install spacer washers followed by hex nuts and tighten evenly.

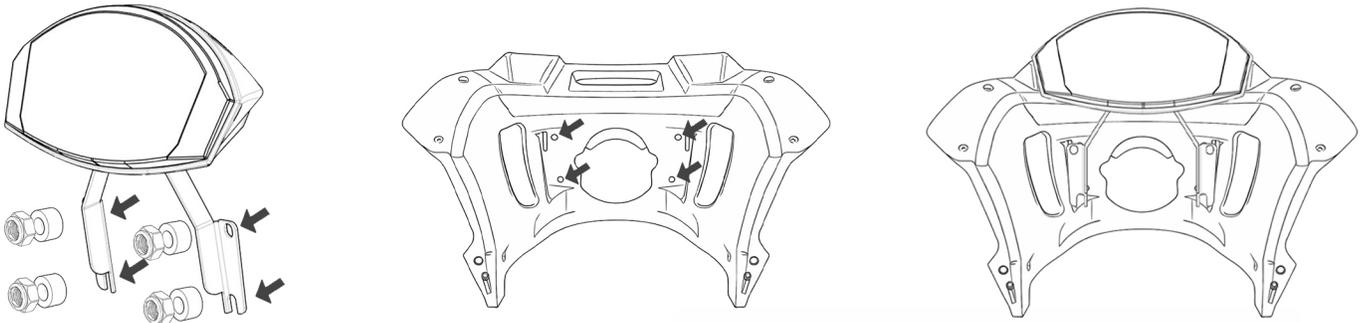

- ❶ Slide assembly into position ❷ Inner fairing bolts ❸ Spacer washers ❹ Hex nuts

Step 3 – Route Power Wire

Route power wire to battery either under the fuel tank or over the tank through the dash and down under the seat. Ensure wire is not pinched or exposed.

Step 4 – Power & Bluetooth Setup

Connect quick-disconnect to Plex Audio system. Press power button and connect to your phone via Bluetooth. Verify operation before reassembly.

- ✓ Completed Installation